

## SWIFT EVO



- Very compact scrubbing machines suitable to work for the maintenance cleaning of limited-size areas (up to 1.500 m<sup>2</sup>)
- Especially suitable for cleaning: car shops, sales points, gym, health care
- Control panel with battery charge level indicator
- Solution water filter and solenoid valve
- Easy access to the battery compartment
- Quick drain and easily inspectable recovery tank
- Non-marking wheels
- Roto-molded polyethylene tanks, shock and acid resistant
- The lower tank also serves as battery compartment
- Low noise operation thanks to the protected positioning of vacuum motor.

### Standard equipment:



- 5.511.1097  
PPL brush Ø 483 mm - 19"



- 4.508.X468  
Front squeegee blade L.830 mm Shore 40 Th. 2.5 mm
- 4.508.X467  
Rear squeegee blade L.870 mm Shore 40 Th. 3 mm



- 0.108.0042  
On-board Battery charger CBHD1 24V 10A  
only for model code:  
8.528.0003 - 8.528.0005



- 0.107.0054  
Maintenance free battery 12V 75Ah BT DC 5.5  
only for model code:  
8.528.0005



Watch the video on youtube:  
[www.youtube.com/ctmcleaning](http://www.youtube.com/ctmcleaning)

	Swift Evo 50E	Swift Evo 50B	Swift Evo 50B	Swift Evo 50B
code	8.528.0001	8.528.0002	8.528.0003	8.528.0005
power supply	230V	24V	24V (battery charger included)	24V (Battery and battery charger included)
scrubbing / squeegee width	500 / 800 mm	500 / 800 mm	500 / 800 mm	500 / 800 mm
max working capacity	2000 m <sup>2</sup> /h	2000 m <sup>2</sup> /h	2000 m <sup>2</sup> /h	2000 m <sup>2</sup> /h
detergent tank capacity	44 l / 11,63 gal	44 l / 11,63 gal	44 l / 11,63 gal	44 l / 11,63 gal
recovery tank capacity	50-60 l / 13,21-16 gal	50-60 l / 13,21-16 gal	50-60 l / 13,21-16 gal	50-60 l / 13,21-16 gal
traction	mechanical	mechanical	mechanical	mechanical
RPM / pressure on the brushes	150/20 kg / 44,09 lbs	150/18 kg / 44,09 lbs	150/18 kg / 44,09 lbs	150/18 kg / 39,68 lbs
brush motor power	550W	550W	550W	550W
detergent solution system	solenoid valve	solenoid valve	solenoid valve	solenoid valve
depression / vacuum motor	1700 mmH <sub>2</sub> O/1000W	1280mmH <sub>2</sub> O/400W	1280 mmH <sub>2</sub> O/400W	1280 mmH <sub>2</sub> O/400W
dimensions / weight	116x46x98cm / 115 kg	116x51x98cm / 114 kg	116x51x98cm / 116 kg	116x51x98cm / 118 kg



Powerful gearmotor; metal brush plate with integrated plastic splash guard/bumper.

### Optional accessories:



- 2 x 0.107.0002  
Tubular battery Pb-acid  
12V 118Ah C5



- 2 x 0.107.0063  
GEL Battery 12 MFP 105  
12V 105Ah C5



- 4.508.1178 Polyurethane  
front blade L.830 TH. 3
- 4.508.1177 Polyurethane  
rear blade L.870 TH. 4



- 5.511.1098  
Tynex brush Ø 483 mm-19"
- 5.511.1128  
PPL 0,03 brush Ø 483 mm-19"
- 5.511.1206  
PES brush Ø 483 mm - 19"



- 5.511.1099  
EWU pad driver Ø 483  
mm-19"




(5 pcs package)

- 6.508.0034  
Abrasive pad Ø 483 mm-19"  
- beige
- 6.508.0041  
Abrasive pad Ø 483 mm-19"  
- green
- 6.508.0048  
Abrasive pad Ø 483 mm-19"  
- black



- 4.512.0068  
Extension electric cord 15 m  
with Schuko plug

The outflow of the detergent solution is controlled by a solenoid valve. The actuation of the solenoid valve is operated by the control lever, avoiding the detergent solution outflow when the brush is stopped during the interruptions of work.

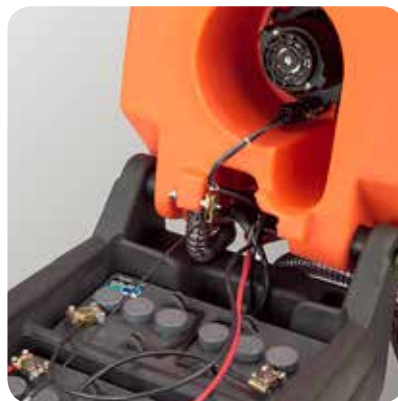

Renovated squeegee with new pressure adjusting system. The squeegee blades are easily replaceable without the use of tools. Quick and easy squeegee coupling through the two large knobs; the squeegee is released without any damage in the event of accidental impact.

Easy and intuitive controls. The outflow of the cleaning solution is easily controlled using the mechanical lever placed on the control panel. Inspectable mesh filter to trap any existing solid body in the cleaning solution.

